

Tata Steel Speciality Steels, Lackenby A Dubai World Company Collection Plan

Loading:

Monday - Friday 0600-1800

POST CODE: TS10


5QW







Reporting/Arrival:










LACKENBY ENTRANCE

INDUCTION

PRAIRE

Loading/Securing:

Stand in **GREEN** area during loading







Straps LC 2000 daN







MIN X 13 Max X 65

LOADS MUST BE SECURED IN LOADING BAY – HAVE STRAPS READY

3. Overview of restraint system

Full load (28 tonnes) on a standard trailer restrained using LC 2000 daN webbing straps:

- 13 over-the-top webbing straps.
- Edge protection at all points of contact between lashing and product.
- Compliant load configuration.
- Minimum 4-off square section timber dunnage.
- Ratchets placed on alternating sides.

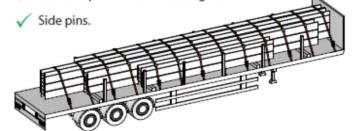


Table 1: Quantity of restraints

Load	LC 2000daN	LC 2500daN	LC 5000daN
0 - 10 t	7	6	3
10 - 15 t	9	8	4
15 - 20 t	10	8	4
20 - 25 t	12	10	5
25 - 28 t	13	11	6

This Load Restraint Guideline is designed to be compliant with the forces stated in EN 12195-1:2003 and VDI 2700.